

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER:

- ☐ 2-BCM ☐ 4-BCM ☐ 6-BCM
☐ 3-BCM ☐ 5-BCM

DIMENSIONS:

- 2-BCM - 36"H x 28"D X 32"L
- 3-BCM - 36"H x 28"D X 46"L
- 4-BCM - 36"H x 28"D X 60"L
- 5-BCM - 36"H x 28"D X 74"L
- 6-BCM - 36"H x 28"D X 88"L

*30" height is available on Petite Elite units

NSF/ANSI STANDARD 7

This unit is listed with CSA in NSF/ANSI Standard 7 for design and construction and has been performance tested for the storage of potentially hazardous foods. The performance test criteria is holding a food-like media at or below 41°F without any freezing for four hours at 86°F ambient temperature.

ELECTRICAL

- 120 volts single-phase
- Eight foot electrical cord with NEMA 5-15P plug
- On/Off switch and pilot light mounted on control panel of unit's operator side

REFRIGERATION SYSTEM

- 1/3 horsepower compressor
- Fan-cooled condensing unit with an expansion valve pressure control switch
- Refrigerant coils shall be of copper tubing wrapped around the sides of the well

WARRANTY

- One year parts and labor. Warranty is detailed on inside front cover of the price list.




5-BCM shown with optional SRTS, BPGC and laminated finish

The Piper Elite 500 Bloomington mechanically refrigerated, extra deep well unit is listed NSF/ANSI Standard 7. Food is recessed on easily removable rails in the pan for maximum cooling efficiency without the use of ice and is ideal as a salad bar merchandiser. Elite 500 units are compatible and will interlock with other Elite 500 units.

STANDARD FEATURES

- 14-gauge stainless steel top with 1-1/2" turndown on all sides
- Top secured by four recessed bolts for easy access
- 14-gauge stainless steel legs
- 18-gauge stainless steel bottom shelf
- 20-gauge stainless steel end and front panels are attached to legs
- 20-gauge stainless steel fully welded 9-7/16" deep well
- Welded watertight well has concealed continuous refrigerated coil bonded to the sides and is fully insulated
- Cold pan has a 1" drain with shut off valve located below the unit on operator's left side. Valve is 3/4" FTP.
- Sliding doors
- Louvered panels for ventilation of condensing unit
- End louver panel removable to access compressor
- 5" diameter swivel plate casters, 2 with brakes
- Interlocking mechanism is provided to interlock with other Elite 500 units

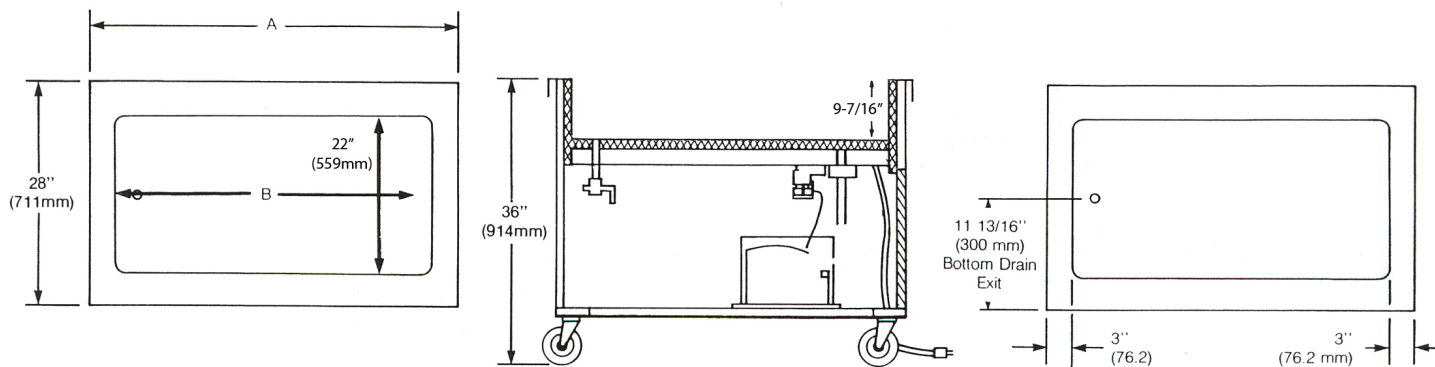

*Amperage/NEMA plug type may vary with options.

Model #	# of Wells	A	B	W	H	*Amperage 120V	*NEMA Cap No.	Ship Wt. (lbs)
2-BCM	2-12x20 Pan Capacity	36.25"	32"	28"	36"	6.3	5-15P	320
3-BCM	3-12x20 Pan Capacity	40.25"	46"	28"	36"	6.3	5-15P	360
4-BCM	4-12x20 Pan Capacity	54.25"	60"	28"	36"	6.3	5-15P	405
5-BCM	5-12x20 Pan Capacity	68.25"	74"	28"	36"	6.3	5-15P	440
6-BCM	6-12x20 Pan Capacity	82.25"	88"	28"	36"	6.3	5-15P	480

DIMENSION ADDITIONS FOR OPTIONS

- Add 23-3/4" to height for buffet protector guard
- Add 14" to height for cafeteria protector guard
- Add 22-3/4" to height for double display shelf
- Add 8" to width for cutting board
- Add 12-3/4" to width for solid ribbed tray slide
- Add 12-1/2" to width for 3-bar tray slide

Note: Line-up drawing required when ordering false front, cashier stand or interconnected units.

Part #	Description	Part #	Description
<input type="checkbox"/> 3BTS	3-Bar Tray Slide 12.75" wide w/hinged brackets	<input type="checkbox"/> CPGL	Cafeteria protector guard with incandescent lights
<input type="checkbox"/> BDD	Buffet double display two-sided protector guard	<input type="checkbox"/> CUT	Cut out for drop in dispensers
<input type="checkbox"/> BPG	Buffet double side protector guard (no heat or lights)	<input type="checkbox"/> DOUT	Duplex Outlet (120V, 15 AMP)
<input type="checkbox"/> BPG1	Buffet single side protector guard (no heat or lights)	<input type="checkbox"/> FB	False bottom
<input type="checkbox"/> BPG1C	Buffet Style Classic Single Sided protector guard	<input type="checkbox"/> FRMA	Formica Laminate Without Doors
<input type="checkbox"/> BPG1FL	Buffet single side protector guard with fluorescent lights	<input type="checkbox"/> HD	Hinged doors with solid bottom
<input type="checkbox"/> BPG1IL	Buffet single side protector guard with incandescent lights	<input type="checkbox"/> MBS	18" maple end bread shelf; left, right - flush with top
<input type="checkbox"/> BPGC	Classic protector guards	<input type="checkbox"/> MCB	Cutting Board Maple - 8" wide w/hinged brackets
<input type="checkbox"/> BPGFL	Buffet double side protector guard with fluorescent lights	<input type="checkbox"/> PPC	Pizzazz Powder Coating
<input type="checkbox"/> BPGH	Buffet double side protector guard with heat strip	<input type="checkbox"/> SBS	18" stainless steel end bread shelf; left, right - flush with top
<input type="checkbox"/> BPGIL	Buffet double side protector guard with incandescent lights	<input type="checkbox"/> SBT	Stainless steel salad bar template
<input type="checkbox"/> CDD	Cafeteria double display (no heat or lights)	<input type="checkbox"/> SCB	Cutting Board Stainless - 8" wide w/hinged brackets
<input type="checkbox"/> CDDC	Cafeteria Style Classic double protector guards	<input type="checkbox"/> SCPGC	Cafeteria Style Classic Single protector guards
<input type="checkbox"/> CDDL	Cafeteria double display with fluorescent lights	<input type="checkbox"/> SKR	Skirting
<input type="checkbox"/> CEG	Cafeteria end guards, right or left	<input type="checkbox"/> SRTS	Solid 3-ribbed tray slide, 16-gauge stainless steel
<input type="checkbox"/> CPG	Cafeteria protector guard (no heat or lights)	<input type="checkbox"/> SSL	Legs in lieu of casters
<input type="checkbox"/> CPGC	Cafeteria Style Classic Single protector guard	<input type="checkbox"/> UCR-1	Refrigerated storage base with doors
<input type="checkbox"/> CPGFL	Cafeteria protector guard with fluorescent lights	<input type="checkbox"/> UCR-2	Refrigerated storage base - Units 74" and longer
<input type="checkbox"/> CPGHL	Cafeteria protector guard with heat and lights		