


JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER:

- ☐ 2HFW-1
- ☐ 2HFW-1DM
- ☐ 3HFW-1
- ☐ 3HFW-1DM
- ☐ 4HFW-1
- ☐ 4HFW-1DM
- ☐ 5HFW-1
- ☐ 5HFW-1DM
- ☐ 6HFW-1
- ☐ 6HFW-1DM

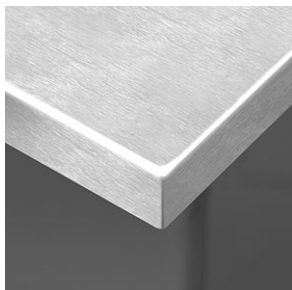

5HFW-1 Series shown

DIMENSIONS:

- 2HFW-1 - 5.625"H x 23.375"W x 28.625"D
- 2HFW-1DM - 5.625"H x 23.375"W x 28.625"D
- 3HFW-1 - 5.625"H x 23.375"W x 43"D
- 3HFW-1DM - 5.625"H x 23.375"W x 43"D
- 4HFW-1 - 5.625"H x 23.375"W x 57.375"D
- 4HFW-1DM - 5.625"H x 23.375"W x 57.375"D
- 5HFW-1 - 5.625"H x 23.375"W x 71.75"D
- 5HFW-1DM - 5.625"H x 23.375"W x 71.75"D
- 6HFW-1 - 5.625"H x 23.375"W x 86.125"D
- 6HFW-1DM - 5.625"H x 23.375"W x 86.125"D

ELECTRICAL

- All units available in 208/240V - 1200W/1600W, single-phase or 3-phase. Specify voltage and phase needed.
- Each well is individually controlled with an infinite control and high limit thermostat with indicator light
- Models with the suffix "T" (example: 2HFW-1T) have thermostat controls in place of the infinite control and high limit

NOTE: Consult factory for part number and availability of thermostat control units

AUTO WATER FILL OPTION

- An optional automatic water fill is available on all units with drains and manifold
- Auto-fill system allows the unit to maintain the proper water level in each well
- A water level sensor is located in one well and a solenoid and water filter is located under the wrapper bottom
- To add this option add the suffix "AF" (example: 2HFW-1AF) to the model number

NOTE: Consult factory for part number and availability of units with auto-fill option






Piper's HFW-1 Multiple Well Drop-ins add a dependable, convenient and economical hot food unit to your counter section. Designed to be used wet or dry, and installed into all-metal counter fixtures. Multiple well units are available with or without drains.

ASSEMBLY STRUCTURE

- One-piece top-mounting flange is stainless steel with die-stamped openings in which the wells are mounted
- Individual wells are 20-gauge stainless steel, one-piece, die-stamped construction
- Locks are included on all sides to fasten unit into the countertop
- Units are fully insulated for high heat transfer
- Drains are manifolded together and include fittings at each end for field attachment of the pipe cap and 3/4 NPT drain valve provided

The recommended mounting procedure is to seal the one-piece top-mounting flange to the countertop by application of silicone NSF Standard 51 rated at 450 F around the topmounting flange before mounting in place.

SPEC D-1

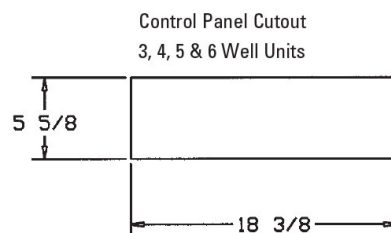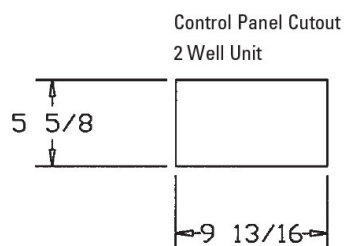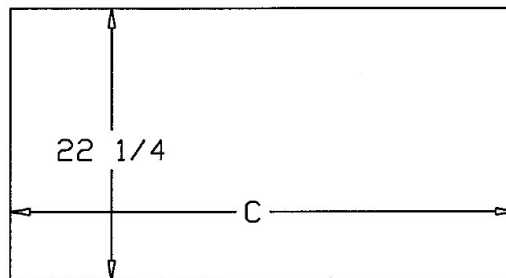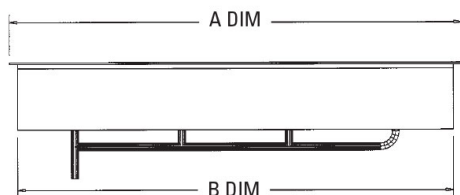

Model#	Description	(A)	(B)	(C)	Volts	Single Phase		Three Phase		Wt. (lb)
						Watts	Amps	Watts	Amps	
2HFW-1	2 Well w/o Drain	29.75"	23.375"	28.625"	208/240	2400/3200	11.5/13.3	2400/3200	6.7/7.7	55
2HFW-1DM	2 Well with Drain	29.75"	23.375"	28.625"	208/240	2400/3200	11.5/13.3	2400/3200	6.7/7.7	85
3HFW-1	3 Well w/o Drain	44.125"	23.375"	43"	208/240	3600/4800	17.3/20.0	3600/4800	10.0/11.6	81
3HFW-1DM	3 Well with Drain	44.125"	23.375"	43"	208/240	3600/4800	17.3/20.0	3600/4800	10.0/11.6	112
4HFW-1	4 Well w/o Drain	58.5"	23.375"	57.375"	208/240	4800/6400	23.1/26.7	4800/6400	13.3/15.4	108
4HFW-1DM	4 Well with Drain	58.5"	23.375"	57.375"	208/240	4800/6400	23.0/26.7	4800/6400	13.3/15.4	138
5HFW-1	5 Well w/o Drain	72.875"	23.375"	71.75"	208/240	6000/8000	28.8/33.3	6000/8000	16.7/19.3	135
5HFW-1DM	5 Well with Drain	72.875"	23.375"	71.75"	208/240	6000/8000	28.8/33.3	6000/8000	16.7/19.3	165
6HFW-1	6 Well w/o Drain	87.25"	23.375"	86.125"	208/240	7200/9600	34.6/40.0	7200/9600	20.0/23.1	162

6HFW-1DM	6 Well with Drain	87.25"	23.375"	86.125"	208/240	7200/9600	34.6/40.0	7200/9600	20.0/23.1	192
----------	-------------------	--------	---------	---------	---------	-----------	-----------	-----------	-----------	-----

SPEC D-1