

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER:

- | | | |
|-----------------------------------|-----------------------------------|------------------------------------|
| • <input type="checkbox"/> 1-CMDI | • <input type="checkbox"/> 1-CIDI | • <input type="checkbox"/> 2-BCMDI |
| • <input type="checkbox"/> 2-CMDI | • <input type="checkbox"/> 2-CIDI | • <input type="checkbox"/> 3-BCMDI |
| • <input type="checkbox"/> 3-CMDI | • <input type="checkbox"/> 3-CIDI | • <input type="checkbox"/> 4-BCMDI |
| • <input type="checkbox"/> 4-CMDI | • <input type="checkbox"/> 4-CIDI | • <input type="checkbox"/> 5-BCMDI |
| • <input type="checkbox"/> 5-CMDI | • <input type="checkbox"/> 5-CIDI | • <input type="checkbox"/> 6-BCMDI |
| • <input type="checkbox"/> 6-CMDI | • <input type="checkbox"/> 6-CIDI | |

DIMENSIONS:

- 1-CMDI - 21.125"H x 22.5"W x 8"D
- 2-CMDI - 23.25"H x 25.75"W x 8"D
- 3-CMDI - 23.25"H x 25.75"W x 8"D
- 4-CMDI - 23.25"H x 25.75"W x 8"D
- 5-CMDI - 23.25"H x 25.75"W x 8"D
- 6-CMDI - 23.25"H x 25.75"W x 8"D
- 1-CIDI - 21.125"H x 25.75"W x 8"D
- 2-CIDI - 23.25"H x 25.75"W x 8"D
- 3-CIDI - 23.25"H x 25.75"W x 8"D
- 4-CIDI - 23.25"H x 25.75"W x 8"D
- 5-CIDI - 23.25"H x 25.75"W x 8"D
- 6-CIDI - 23.25"H x 25.75"W x 8"D
- 2-BCMDI - 25.5625"H x 28"W x 11"D
- 3-BCMDI - 25.5625"H x 28"W x 11"D
- 4-BCMDI - 25.5625"H x 28"W x 11"D
- 5-BCMDI - 25.5625"H x 28"W x 11"D
- 6-BCMDI - 25.5625"H x 28"W x 11"D

ELECTRICAL

- Unit is 120 volt single phase
- A junction box is provided for field wiring. These units are designed to be mounted in all metal fixtures

REFRIGERATION SYSTEM- CM & BCM UNITS

- CM units - Refrigeration coils are copper tubing mounted to the bottom of the well
- BCM units - Refrigeration coils are copper tubing mounted to the sides of the well
- 1/3 horsepower fan cooled condensing unit with a capillary tube and thermostat for control
- Environmentally safe 134A refrigerant

NSF/ANSI Standard 7

Mechanically Refrigerated/Ice Cooled (CM) and Ice Only (CI) units are designed to be used with ice. Mechanical refrigeration is added to retard the melting of the ice. These units have NOT been performance tested for the storage of potentially hazardous foods.

BCM units are listed with CSA in NSF/ANSI Standard 7 for design and construction and has been performance tested for the storage of potentially hazardous foods. The performance test criteria is holding a food-like media at or below 41°F without any freezing for four hours at 86°F ambient room temperature.

WARRANTY

- One year parts and labor. Warranty is detailed on inside front cover of the price list.

SHIPPING INFORMATION

- Shipping Weight: 115
- Shipping Cubic Feet: 10.4
- Freight Class: 92.5



“BCM” Extra Deep Mechanically Refrigerated

These Mechanically Refrigerated-Ice Cooled (CM models), Extra Deep Refrigerated (BCM models) and Ice Only (CI models) Multiple Cold Drop-in units are ideal for salad bar and dessert applications.





STANDARD FEATURES

- 14-gauge stainless steel top with a feathered down edge on all sides for dropping into countertop
- Well is fabricated of 20-gauge stainless steel and is 5" deep, Extra deep models (BCM) have a well depth of 9-7/16"
- Well is insulated with 1" fiberglass around sides and 2" thick fiberglass on bottom
- A 1" I.D. drain is built into the bottom of the well with shut-off valve
- Well is completely enclosed in a galvanized sheet housing, attached to framework

D | DROP-INS

Single and Multiple Cold Drop-Ins

Listed NSF Standard 7

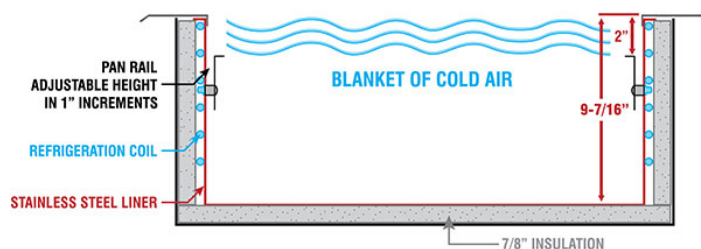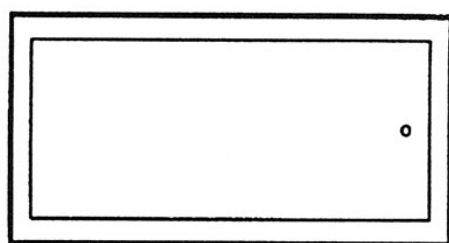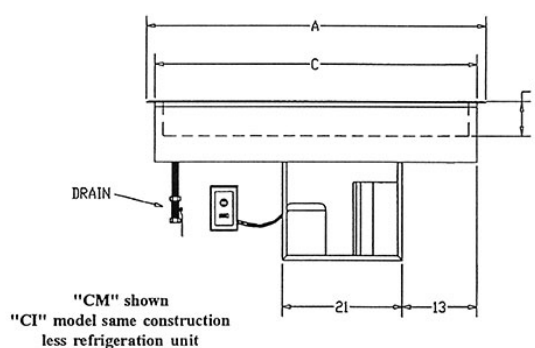

Part #	Category	Type	Cutout Dimensions	(A)	(B)	(C)	(D)	(E)	Well Depth (F)	Amperage	Voltage	Ship Wt. (lbs)
1-CIDI	ICE PAN	1-Well	13.5625" x 21.5625"	17.625"	25.75"	13.125"	21.125"	5"	6.3	70	70	70
2-CIDI	ICE PAN	2-Well	29.625" x 23.625"	31.625"	25.75"	29"	23.25"	5"	6.3	90	90	90
3-CIDI	ICE PAN	3-Well	43.625" x 23.625"	45.62"	25.75"	43"	23.25"	5"	6.3	110	110	110
4-CIDI	ICE PAN	4-Well	57.625" x 23.625"	59.625"	25.75"	57"	23.25"	5"	6.3	130	130	130
5-CIDI	ICE PAN	5-Well	71.625" x 23.625"	73.625"	25.75"	71"	23.25"	5"	6.3	150	150	150
6-CIDI	ICE PAN	6-Well	85.625" x 23.625"	87.875"	25.75"	85"	23.25"	5"	6.3	170	170	170

Part #	Category	Type	Cutout Dimensions	(A)	(B)	(C)	(D)	(E)	Well Depth (F)	Amperage	Voltage	Ship Wt. (lbs)
1-CMDI	MECHANICAL REFRIGERATION	1-Well	13.5625" x 21.5625"	17.625"	22.5"	13.125"	21.125"	5"	6.3	115	115	115
2-CMDI	MECHANICAL REFRIGERATION	2-Well	29.625" x 23.625"	31.625"	25.75"	29"	23.25"	5"	6.3	135	135	135
3-CMDI	MECHANICAL REFRIGERATION	3-Well	43.625" x 23.625"	45.62"	25.75"	43"	23.25"	5"	6.3	155	155	155
4-CMDI	MECHANICAL REFRIGERATION	4-Well	57.625" x 23.625"	59.625"	25.75"	57"	23.25"	5"	6.3	175	175	175
5-CMDI	MECHANICAL REFRIGERATION	5-Well	71.625" x 23.625"	73.625"	25.75"	71"	23.25"	5"	6.3	195	195	195
6-CMDI	MECHANICAL REFRIGERATION	6-Well	85.625" x 23.625"	87.875"	25.75"	85"	23.25"	5"	6.3	215	215	215

SPEC D-7

PIPER
The Food-Focused Equipment Company

300 S. 84th Avenue
Wausau, WI 54401
Phone: 800-544-3057
Fax: 715-842-3125
www.piperonline.net

Part #	Category	Type	Cutout Dimensions	(A)	(B)	(C)	(D)	(E)	Well Depth (F)	Amperage	Voltage	Ship Wt. (lbs)
2-BCMDI	BLOOMINGTON EXTRA DEEP WELL *DEPTH OF PAN IS 9.4375" Listed NSF/ANSI Standard 7	2-Well	30-7/8" x 26-1/2"	32"	28"	30"	25.5625"	9.4375"	6.3	230	230	230
3-BCMDI	BLOOMINGTON EXTRA DEEP WELL *DEPTH OF PAN IS 9.4375" Listed NSF/ANSI Standard 8	3-Well	44-7/8" x 26-1/2"	46"	28"	44"	25.5625"	9.4375"	6.3	250	250	250
4-BCMDI	BLOOMINGTON EXTRA DEEP WELL *DEPTH OF PAN IS 9.4375" Listed NSF/ANSI Standard 9	4-Well	58-7/8" x 26-1/2"	60"	28"	58"	25.5625"	9.4375"	6.3	275	275	275
5-BCMDI	BLOOMINGTON EXTRA DEEP WELL *DEPTH OF PAN IS 9.4375" Listed NSF/ANSI Standard 10	5-Well	72-7/8" x 26-1/2"	74"	28"	72"	25.5625"	9.4375"	6.3	290	290	290
6-BCMDI	BLOOMINGTON EXTRA DEEP WELL *DEPTH OF PAN IS 9.4375" Listed NSF/ANSI Standard 11	6-Well	86-7/8" x 26-1/2"	88"	28"	86"	25.5625"	9.4375"	6.3	310	310	310

SPEC D-7



300 S. 84th Avenue | Wausau, WI 54401
Phone: 800-544-3057 | Fax: 715-842-3125
www.piperonline.net

LIMITED WARRANTY: PIPER PRODUCTS warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times. We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.