

K | HEATING AND HOLDING CABINETS

Insulated Holding Cabinets Stainless Steel



1016-SS



1008

Piper Holding Cabinets are perfect for maintaining temperatures up to 225 degrees fahrenheit.* A member of our Chef System™ line, this cabinet utilizes separate heat and humidity controls for precise control over the holding environment. This allows the unit to be used for holding, warming, and proofing.

It is available in multiple configurations, including a warmer with single or dutch doors, a double warmer with individually controlled holding sections, or a half size warmer for smaller operations. Each is designed to hold 18" x 26" bun pans or 12" x 20" steam table pans.

STANDARD FEATURES

- Precise Temperature to 225° and Humidity Control
- Stainless Steel Construction
- All exterior walls formed from 20 gauge stainless steel type 304
- Two inch insulation surrounds the entire cabinet
- 1" x 2-1/2" fully welded steel foundation

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER:

- ☐ 1008-SS
- ☐ 1016-SS
- ☐ 1016-SS-D

DIMENSIONS:

- 1008-SS - 48.875"H x 29.75"W X 31.625"D
- 1016-SS - 74.75"H x 29.75"W X 31.625"D
- 1016-SS-D - 74.75"H x 29.75"W X 31.625"D

HEAT SYSTEM

- Individual heat and food moisture controls
- Digital read-out for accuracy
- Stainless steel 1 gallon water pan
- Unit removable for easy cleaning & maintenance
- 60 minute timer

Heavy Duty Door

- Fully insulated
- Full perimeter high-temp gasket
- Stainless Steel or Glass full-view panel
- 1" x 2-3/4" extruded frame
- Left hinge standard, right hinge available. Please specify upon ordering

Flexible pan glide system

- Removable chrome racks with adjustable spacing every 1.5"
- Accommodates 18" x 26" bun pans or 12" x 20" steam table pans
- Removable for easy cleaning

Warranty

- One year parts and labor. Warranty is detailed on inside front cover of the price list.


COMMON OPTIONS

<input type="checkbox"/>	GL	Glass Doors (Price Per Door)
<input type="checkbox"/>	LH	Locking Hasp
<input type="checkbox"/>	PB	Full Perimeter Bumper (adds 2" to overall length and width)
<input type="checkbox"/>	PT	Pass-Thru Option

SPEC K-3

K | HEATING AND
HOLDING CABINETS

Insulated Holding Cabinets
Stainless Steel

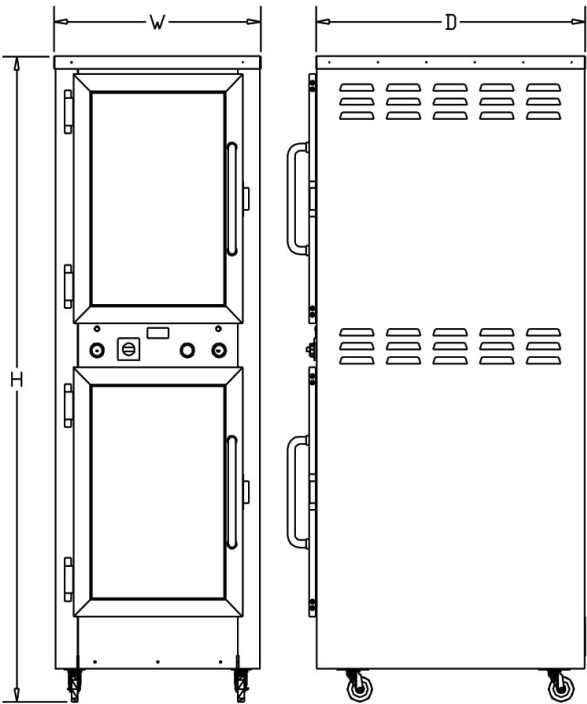

Interior View



Control Panel View

Model #	Description	Height Inches	Width Inches	Depth Inches	Glide Spacing	18"x26" Capacity	12"x20" Capacity	Ship Wt. (lbs)	Voltage	Watts	Amps	NEMA
1008-SS	Half Size	48.875"	29.75"	31.625"	1.5"	8	16	280	120V	2000	16.7	5-20P
1016-SS	Standard	74.75"	29.75"	31.625"	1.5"	16	32	460	120V	2750	22.9	5-30P
1016-SS-D	Double Unit	74.75"	29.75"	31.625"	1.5"	16	32	460	120V	4000	33.3	5-50P

Height includes casters.

Typical freight class: 100

Holds: 18" x 26" bun pans, 12" x 20" steam table pans.

Applications: Meat, Poultry, Fish, Vegetables, Casseroles, Bakery rolls, Etc.