



DO-16-G

Our large-scale double ovens are designed for easy operation and energy efficiency. If you need a reliable work-horse to produce quality baked goods, look no further than the DO-16-G from Super Systems. Created with the high-volume bakery in mind, the individually controlled decks give our best hearth bake, while the handy reminder timer and full-view glass doors eliminate production hassles.

## STANDARD FEATURES

- 2 Individually controlled 8 pan ovens
- Glide doors allow individual access to oven sections for loading and unloading, maintaining consistent baking temperatures and higher energy efficiency
- Natural convection & radiant heat design does not dry out product
- Each deck individually thermostatically controlled - provides more control over your baking environment
- No moving parts in oven reduces maintenance problems and increases reliability
- Bake pizzas right on deck
- Stainless steel construction easily cleaned and maintained
- Positive magnetic door closure
- 60 Minute reminder timer
- Full-view, heat-reflective tempered glass door allows for energy-efficient sight baking
- Field reversible doors, left or right hinged
- Each deck brightly lighted provides sight merchandising
- Maximum Oven Temp 450°

JOB \_\_\_\_\_ ITEM # \_\_\_\_\_ QTY # \_\_\_\_\_

## MODEL NUMBER:

- ☐ DO-16-G
- ☐ DO-18-G

## DIMENSIONS:

- DO-16-G - 69"H x 91"W X 36"D
- DO-18-G - 75"H x 69"W X 36"D

## INTERIOR DIMENSIONS:

- 6.5" to 8.5" Deck Spacing

## CONSTRUCTION

The oven corner posts shall be 18 gauge stainless steel with a 20 gauge stainless steel wrapper for top, sides and back panels. The interior oven cavity shall be constructed of heat retentive 18 gauge aluminized steel with chrome plated wire racks on .190 aluminum decks.

The oven shall work with a patented "Heat Sink" principle and "Natural Convection" technology. When the materials in the oven are heated to the proper temperature the oven shall bake with radiant heat and conduction. The oven shall also have heat release vents that draws air through the oven cavity and over decks.


The oven shall have no moving parts. Each deck shall be individually, thermostatically controlled. The oven shall have a heat reflective tempered glass door.

## VERSATILE

- Bake on deck or use half or full size pans
- Bake pizza right on the deck
- Sub rolls
- Muffins

## WARRANTY

One year parts and labor. Warranty is detailed on inside front cover of the price list.

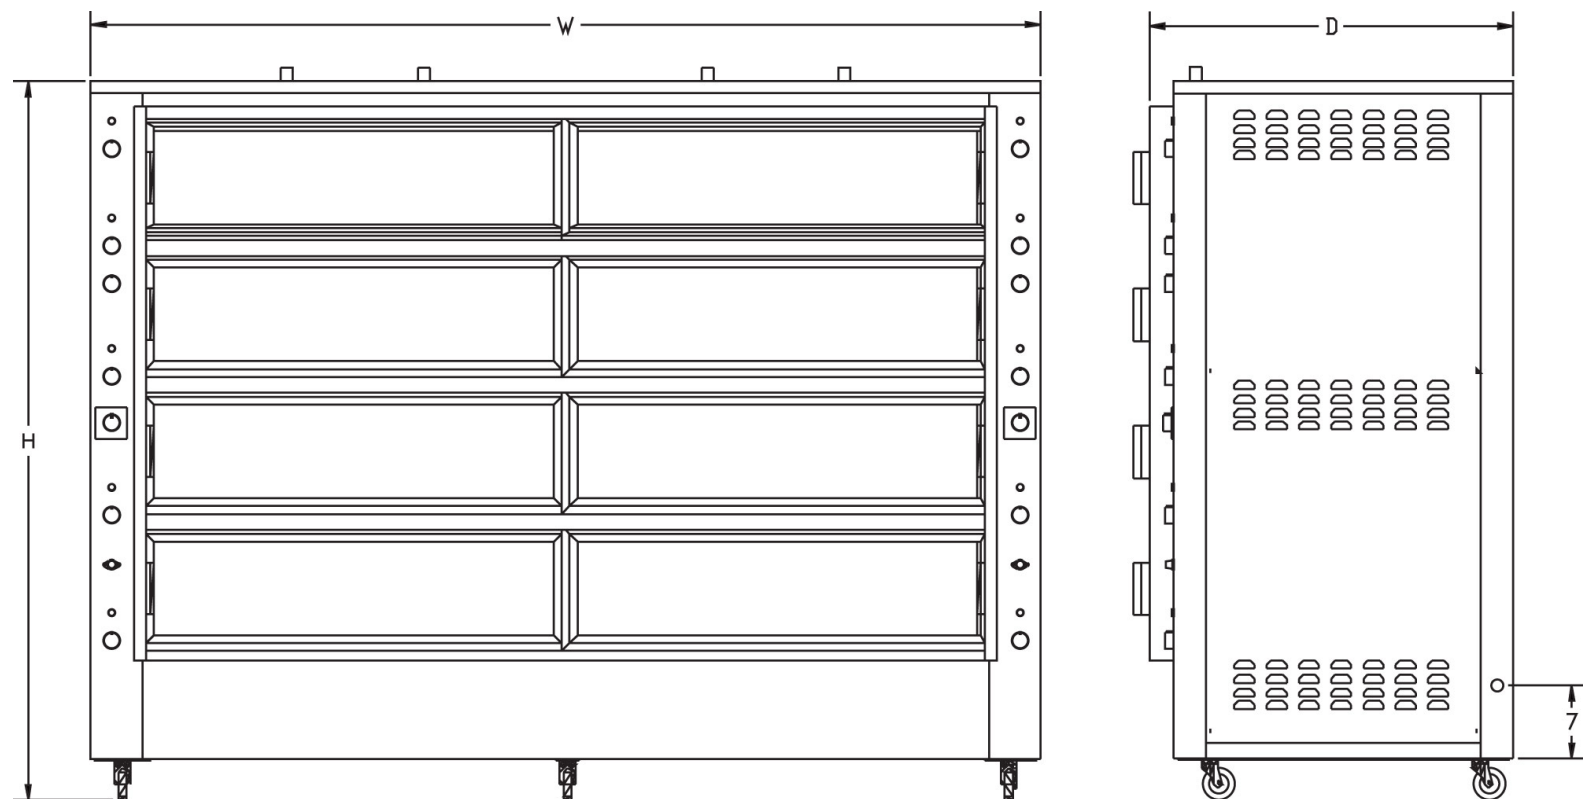

### ELECTRICAL\*

	VOLTS	PHASE	WIRE**	AMPS	WATTS	HERTZ
10 Standard Two Circuit	120/208	1	3	62	25,320	60
	120/240	1	3	54	25,320	60
30 Standard One Circuit	120/208	3	4	84	25,320	60
	120/240	3	4	72	25,320	60
30 Optional Two Circuit	120/208	3	4	42	25,320	60
	120/240	3	4	36	25,320	60

\*Units are shipped without cord and plug. Designed to be hard wired. Installation requires a 4" clearance around the entire unit and should be made by a licensed electrician. Check local codes for vent hood requirements.

\*\* Number of wires does not include ground.

### COMMON OPTIONS

- ☐ HVS High Volume Steam (top oven section only)\*
- ☐ HVS2 High Volume Steam (2 oven sections)

### CAPACITY

- 16, Standard 16" x 26" Sheet Pans, 32, 4-strapped 1lb Bread Pans, 24, 4-strapped 1.5lb Bread Pans, 96, 9" Pies

### SHIPPING INFORMATION

- Shipping Weight: 1800 Lbs
- Shipping Cubic Feet: 130.34
- Freight Class: 100

### SPEC P-6

# PIPER

The Food-Focused Equipment Company

300 S. 84th Avenue | Wausau, WI 54401  
Phone: 800-544-3057 | Fax: 715-842-3125  
[www.piperonline.net](http://www.piperonline.net)

**LIMITED WARRANTY: PIPER PRODUCTS** warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times. We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.